

## RLN16-410

### 16-Channel PoE NVR, 24/7 Reolink Cameras Reliable Video Recording

- 16-Channel NVR
- Support up to 16MP
- Local & Remote Access


## Specifications

Hardware	
Hardware	N6MB01
Video/Audio Input	
IP Video Input	PoE IP camera x 16
Audio Input	Cameras with built-in mic
Video/Audio Output	
Video Output	VGA, HDMI
Display Resolution	<ul style="list-style-type: none"> <li>• HDMI: 3840*2160, 1920*1080, 1280*1024, 1280*720, 1024*768</li> <li>• VGA: 1920*1080, 1280*1024, 1280*720, 1024*768</li> </ul>
Audio Output	1-channel, RCA
Decoding	
Live View/Playback Resolution	4096*3072/3840*2160/2560*1920/2560*1440/2048*1536/2304*1296/1080p/720p
Video Format	H.265, H.264


Synchronous Playback	Up to 4 channels
<b>HDD</b>	
SATA	2 x SATA interface
Capacity	Up to 12TB (max. 6TB capacity for each HDD)
External HDD	No
<b>External Interface</b>	
USB Interface	2 x USB 2.0
Network Interface	<ul style="list-style-type: none"> <li>· 1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface for LAN/WAN</li> <li>· 16, RJ-45 10/100 Mbps self-adaptive PoE Ethernet interface for IP camera</li> </ul>
<b>PoE</b>	
Max. Power Per Port	25W
Supported Standard	IEEE 802.3 af/at
<b>Network</b>	
Network Protocol	HTTP, TCP/IP, UDP, DHCP, P2P, UPNP, RTSP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
Browser Supported	Firefox, Chrome, Edge, Safari
OS Supported	PC: Windows, Mac OS; smartphone: iOS, Android
Max. User Access	20 users (1 admin account & 19 user accounts); up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
<b>General</b>	
Power Supply	DC 48V~54V
Power Consumption	<10W (without HDD & PoE)
Working Environment	Temperature: -10°C~+45°C (14°F~113°F); humidity: 10%~90%
Dimensions	330 x 45 x 285mm

Weight	2.4kg
<b>Warranty</b>	
Limited Warranty	2-year limited warranty. For support, visit <a href="https://support.reolink.com/hc/en-us/">https://support.reolink.com/hc/en-us/</a> .


## Gallery & Specs

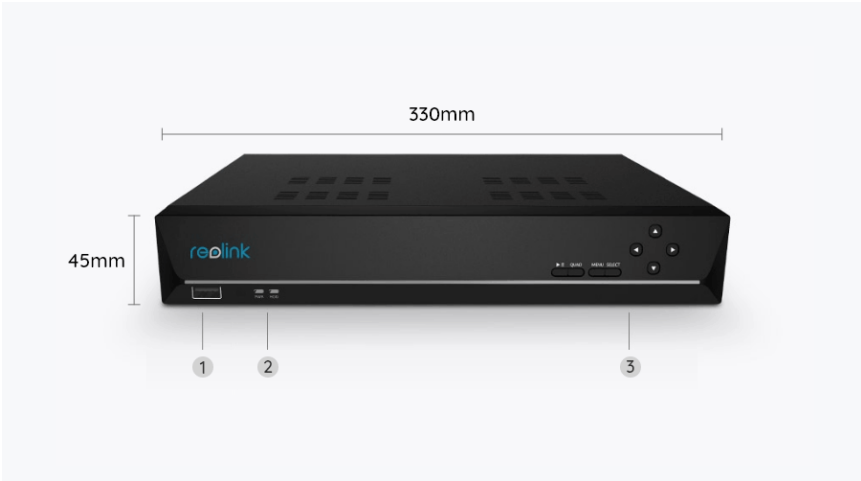

1. USB Port
2. Power LED/HDD LED
3. Control Panel

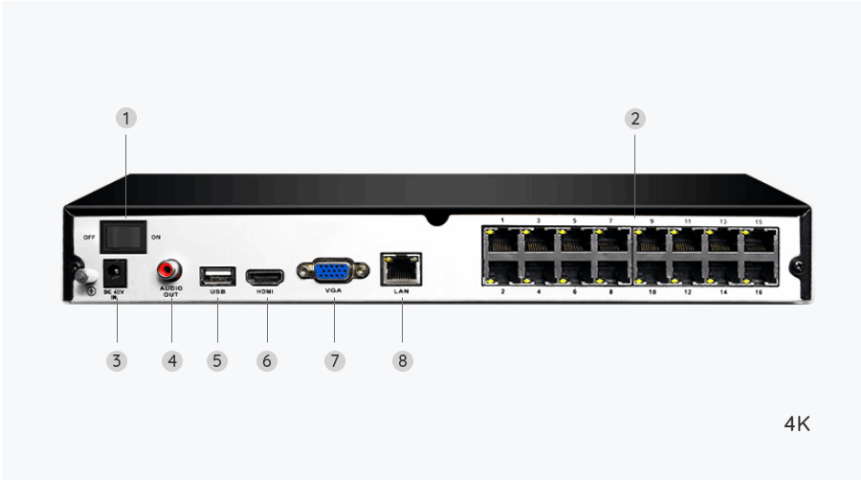

1. On/Off Switch
2. RJ45
3. Power Input
4. Audio Out
5. USB Port
6. HDMI Port
7. VGA Port
8. Network

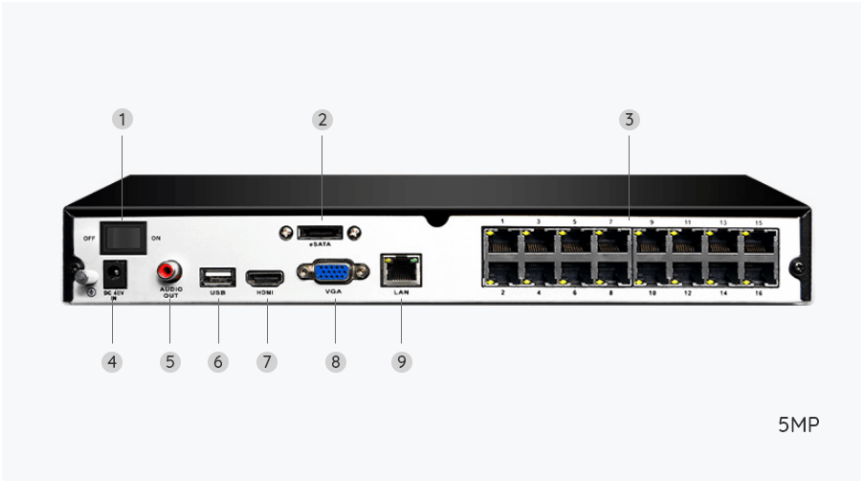

1. On/Off Switch
2. eSATA
3. RJ45
4. Power Input
5. Audio Out
6. USB Port
7. HDMI Port
8. VGA Port
9. Network